

KombiSIGN 40 / ClassicLOOK

KS40 Classic BWM 24VAC/DC GN/YE/RD



Part No.: 639.300.01
Series: KombiSIGN 40

MECHANICAL DATA	
Height	215 mm
Diameter	40 mm
Materials	PC
Dome colour	Green Red Yellow
Housing colour	Black
Protection category	IP66 IP69K
Connection	Push-in terminal
cross-sectional area minimum	0,25mm ² / 24AWG
cross-sectional area maximum	1,50mm ² / 16AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Tension relief	Not present
Type of fixing	Base mounting Wall mounting
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	210 g
Product weight	129 g

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	40 mA	
Rated inrush current	500 mA	
Protection class	Protection class 3	
Pollution degree	3	
Request to external PSU	SELV/PELV	

OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 40 / ClassicLOOK

KS40 Classic BWM 24VAC/DC GN/YE/RD

Optical signal image	Blink Permanent
Blink frequency	1 Hz
Service life optical	50,000 h maximum


APPROVAL DATA	
Conforms with CE	Yes (through the components)
Conforms with RoHS directive	Fulfills substance restriction
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 40 / ClassicLOOK

KS40 Classic BWM 24VAC/DC GN/YE/RD

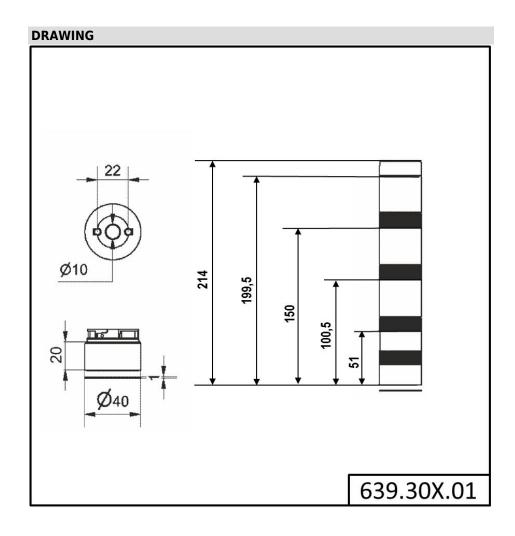

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.