

## KombiSIGN 40 / DesignLOOK

## Adapter f. tube mount. RM GY



Part No.:	630.730.00
Series:	KombiSIGN 40



MECHANICAL DATA		
Height	80 mm	
Diameter	40 mm	
Materials	PC	
Housing colour	Grey	
Protection category	IP66 IP69K	
Cable entry	Through hole	
Cable entry maximum	d = 9 mm	
Type of fixing	Tube mounting	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	45 g	
Product weight	45 g	

ELECTRICAL DATA	
Pollution degree	3


APPROVAL DATA		
Conforms with CE	No	
Conforms with RoHS directive	Fulfills substance restriction	
WEEE	No	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	No	
Conforms with CMIM	No	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 40 / DesignLOOK

## Adapter f. tube mount. RM GY

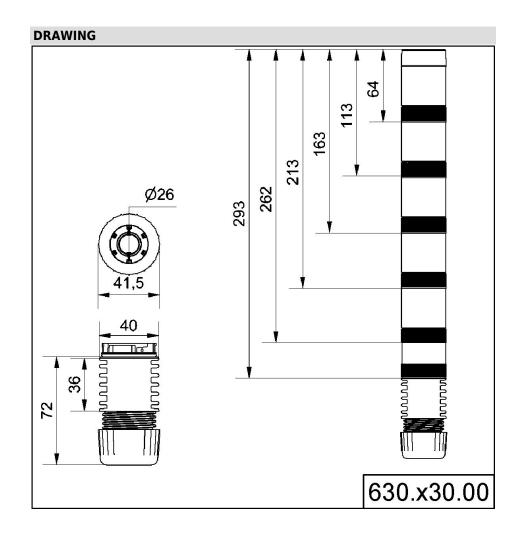

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.