

Mini / MC55

## MC55 RGY Buzzer M12-plug 24VDC



|           |            |
|-----------|------------|
| Part No.: | 240.240.55 |
| Series:   | MC55       |



### MECHANICAL DATA

|                             |                     |
|-----------------------------|---------------------|
| Height                      | 71 mm               |
| Diameter                    | 55 mm               |
| Materials                   | PC<br>PC/ABS        |
| Dome colour                 | Translucent         |
| Housing colour              | Black               |
| Protection category         | IP65                |
| Connection                  | M12 plug 5-pole     |
| Cable length                | 100 mm              |
| Tension relief              | Pull-out protection |
| Type of fixing              | Built-in mounting   |
| Working temperature minimum | -20°C               |
| Working temperature maximum | +50°C               |
| Weight with packaging       | 96 g                |
| Product weight              | 71 g                |

### ELECTRICAL DATA

|                             |                                |
|-----------------------------|--------------------------------|
| Operating voltage           | 24V                            |
| Operating voltage type      | DC                             |
| Operating voltage tolerance | +/- 10%                        |
| Rated operational voltage   | 24 VDC                         |
| Rated operational current   | 45 mA                          |
| Rated inrush current        | <150mA                         |
| Protection class            | Protection class 2             |
| Pollution degree            | 3<br>In the connection area: 2 |

### OPTICAL DATA

|                      |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | MC 3 colours     |
| Optical signal image | Permanent        |
| Service life optical | 50,000 h maximum |

### ACOUSTIC DATA

|                             |                 |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 85,0 dB (A)     |
| Acoustic signal image       | Pulse tone      |
| Number of tones             | 1 tone          |
| Audio frequency             | 3400 Hz         |
| Acoustic service life       | 5,000 h minimum |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.


Mini / MC55

## MC55 RGY Buzzer M12-plug 24VDC

### APPROVAL DATA

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | No                    |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | 10 years              |
| Conforms with VdS             | No                    |
| MTTF-value [years]            | 172                   |

### DRAWING

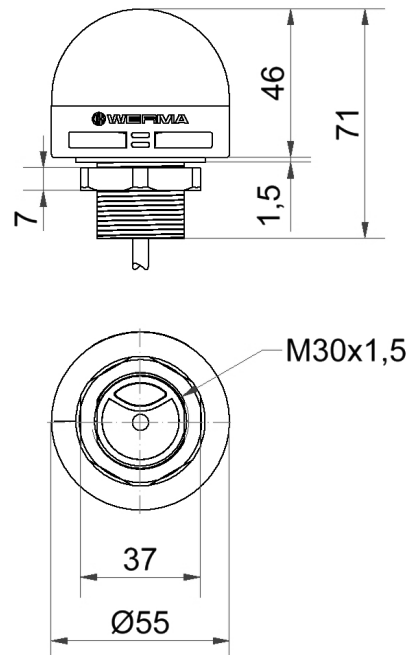

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.